

GLASSWOOL 48kg RIGID SHEETS AND ACOUSTIC BLANKET MEDIUM WEIGHT EQUIPMENT INSULATION

Description

Glasswool 48kg Rigid Sheets and Acoustic Blanket provide an excellent balance of both thermal and acoustic insulation properties, which render them suitable for a broad range of industrial applications. They are particularly suited to the mechanical services industry where design requirements dictate optimum performance from internally lined air conditioning ducts, plant room and equipment casings. In such applications, Glasswool 48kg Rigid Sheets and Acoustic Blanket offer the additional benefits of high compressive strength and clean, accurate fabrication

Features and Benefits

Superior NRC acoustic sound absorption coefficient performance	Minimises impact of excessive noise created by overall ducting systems, plants rooms and equipment
High Compressive strength	Creates clean accurate fabrication where optimum performance in air conditioning ductwork, plant room and equipment casing is required
Non Combustible	Will not burn or contribute to the spread of flame, meeting flammability requirements of AS/NZS1530.3 and AS4254.2 offering compliance for NCC requirements

Product Data

Material R-value m ² K/W	Thickness mm	Sheet width mm	Sheet length mm	Roll width mm	Roll length m	Density kg/m ³	Density kg/m ³	Mass/uit area kg/m ²
R0.8	25	1200	2400	1200	15	48	48	1.2
R1.2	38	1200	2400	–	–	48	48	1.8
R1.5	50	1200	2400	1200	75	48	48	2.4
R2.3	75	1200	2400	–	–	48	48	3.6
R3.0	100	1200	2400	–	–	48	48	4.8
R3.0	100	1500	2400	–	–	48	48	4.8


Thermal Performance

The R-value of Glasswool 48kg Rigid Sheets and Acoustic Blanket is determined in accordance with AS/NZS 4859.1. The thermal conductivity of Glasswool 48kg Rigid Sheets and Acoustic Blanket at a mean temperature* 23°C is 0.032 (at 20°C it is 0.031 W/mK) when tested in accordance with ASTM C177. Values of thermal conductivity may be obtained from the graph.

$$\text{*Mean Temperature} = \frac{T_1 + T_2}{2}$$

Where T1 = temperature of hot side of insulation (°C)

Where T2 = temperature of cool side of insulation (°C)

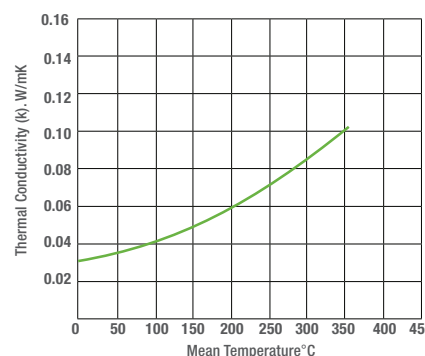

Fire Hazard Properties

Glasswool 48kg Rigid Sheets and Acoustic Blanket material is not deemed combustible according to the test criteria specified in Clause 3.4 of AS 1530.1:1994.

Test Method/Standard	Test Results
	Unfaced
Combustability (AS/NZS 1530.1:1994)	Non combustible

Moisture Absorption

Tested in an atmosphere of 65% relative humidity at 20°C in accordance with British Standard 2972. The moisture content of Glasswool 48kg Rigid is less than 0.1% by volume.

Acoustic Performance

Glasswool 48kg Rigid Sheets and Acoustic Blanket has the following sound absorption coefficients when tested in accordance with AS1045 by the Reverberation Room Method (Mounting N4-laid flat on floor):

Product	Nominal thickness mm	Sound absorption coefficients (reverberation) at frequencies (Hz) of:					
		125	250	500	1000	2000	NRC
Rigid Glasswool: Plain	25	0.07	0.26	0.67	0.95	1.02	0.70
	50	0.25	0.85	1.00	1.00	1.00	1.00
Rigid Glasswool: Black Tissue Faced	25	0.08	0.33	0.73	0.94	1.04	0.75
	50	0.26	0.79	1.16	1.09	1.08	1.05
Rigid Glasswool: Perforated Foil Faced (e.g. Sisalation® 450)	25	0.11	0.29	0.77	1.04	1.03	0.80
	50	0.25	0.89	1.15	1.12	1.09	1.05

Environmental Properties

Baron Insulation avoids the use of Ozone Depleting Potential (ODP) substances in the manufacture or composition of its FBS-1 Glasswool Bio-Soluble Insulation® and Sisalation® reflective foil products.

Health and Safety

Glasswool 48kg Rigid Sheets is manufactured from FBS-1 Glasswool Bio-Soluble Insulation®. FBS-1 Glasswool Bio-Soluble Insulation® is safe to use and meets the criteria of the Australian Safety and Compensation Council (formerly NOHSC) to be classified as non-hazardous. Baron Insulation™ glasswool can be used with confidence in any residential, commercial or industrial application.

Technical Specification

When specifying, state the following:

The insulation material shall be Glasswool 48kg _____ (specify 'Sheets' or 'Acoustic Blanket').

© Baron Insulation Pty Limited 2023. Baron Insulation reserves the right to change product specifications without prior notification. Information in this publication and otherwise supplied to users as to the subject product is based on our general experience and is given in good faith, but because of the many particular factors which are outside our knowledge and control and affect the use of products, no warranty is given or is to be implied with respect to either such information or the product itself, in particular the suitability of the product for any particular purpose. The purchaser should independently determine the suitability of the product for the intended application. Unless otherwise stated all ™ and ® are trademarks and registered trademarks of Baron Insulation Pty Limited ABN 99 132 459 931. BTDS_Revision_3_Issue Date_01062025

For more information
call (03) 8773 9300

email sales@baroninsulation.com.au or
web www.baroninsulation.com.au

